




MINI-T GPS DISCIPLINED CLOCK MODULE

KEY FEATURES

- Ultra-Compact one-board design
- 10MHz and PPS outputs
- High-precision oscillator disciplined by GPS
- Proven clock technology
- Custom frequencies and form factors available
- RoHS-compliant (Pb free)

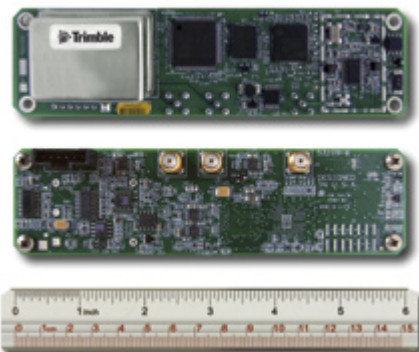

DESIGNED TO EMBED PRECISE TIME AND FREQUENCY IN YOUR APPLICATION

The Trimble Mini-T™ takes GPS disciplined clocks to a new level of integration that provides a simple, cost effective and high performance solution in Trimble's smallest form factor to date.

The Mini-T gives OEMs the opportunity to embed a low-cost precise time and frequency reference, in our smallest form-factor yet. Trimble created the Mini-T using clock technology proven in generations of deployed units used in CDMA, WLL, WiMAX, and broadcasting applications. It utilizes the latest in GPS technology, combined with a precision ovenized oscillator for near-atomic clock precision timing.

Ease of integration and use

The Mini-T eliminates the need for expensive rack-mount timing boards, because you can embed the Mini-T on your board to save space and power. Trimble integrates the GPS and timing circuitry all on a single board—no extra GPS daughter board means that Trimble offers a lower part count, resulting in higher reliability and lower cost.

On power-up, the Mini-T performs a self-survey automatically, and only one satellite is required for on-going operation. Timing Superpackets™ offer the user all of the timing information required by the host application, in an easy-to-use format.

The Trimble proprietary Time-Receiver Autonomous Integrity Monitoring (T-RAIM) carefully validates the satellite signals, ignoring inaccurate information that could interfere with the precision outputs.

Proven reliability

Trimble has deployed tens of thousands of GPS clocks into the field over the last decade, which continue to perform year after year. The Mini-T offers proven reliability and performance will exceed your expectations, and enable you to provide your customers with the highest quality GPS solution available today.

The Mini-T GPS Clock is offered with a standard 10MHz output, but it is also available in custom frequencies. A starter kit is also available for customer evaluations.

MINI-T GPS DISCIPLINED CLOCK MODULE

PERFORMANCE SPECIFICATIONS

General	L1 frequency, C/A code (SPS) 12-channel, continuous tracking receiver
Update Rate:	1 Hz
1 PPS Accuracy	GPS 15 nanoseconds (one sigma, without SA)
Output Frequency	10 MHz
Phase Noise	10 Hz -120 dBc 100 Hz -135 dBc 1 KHz -145 dBc 10 KHz -145 dBc 100 KHz -145 dBc

ENVIRONMENTAL SPECIFICATIONS

Operating Temp	0 °C to +60 °C
Storage Temp	-40 °C to +85 °C
Operating Humidity	5% to 95%, non-condensing
Operating Altitude	18,000 m


INTERFACE SPECIFICATIONS

1 PPS	Connector SMA-f (J3) TTL levels into 50 ohms 10 microsecond-wide pulse with the leading edge synchronized to GPS within 20 nanoseconds (one sigma) in static, time-only mode. Rising time: <20 nanoseconds Pulse shape affected by distributed capacitance of interface cable/circuit.
10 MHz	Connector SMA-f (J2)
Antenna Interface	SMA-f (J4)
Power and I/O	Connector Molex 70543-0005 (6-pin) (J1) Pin 1- NC Pin 2- GPS TXD 3.3V CMOS Level Pin 3- GPS RXD 3.3 V CMOS Level (5 V tolerant) – Pulled to 3.3 V through a 10k Ohm resistor Pin 4 – Ground Pin 5 - +V Antenna – Supports 2.7 V DC to 5.5 V DC @ up to 100ma. Pin 6 - +5 V± 0.25 V @ <750ma (cold) and <350ma (warm)
Serial Protocol	Trimble Standard interface Protocol (TSIP) binary protocol @ 9600, 8-None-1

PHYSICAL CHARACTERISTICS

Mounting Four 0.130" diameter mounting holes

MECHANICAL OUTLINE

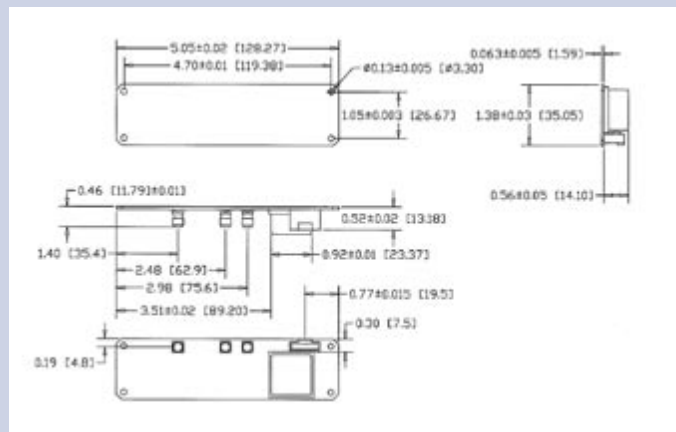

ORDERING INFORMATION & ACCESSORIES

Please go to www.trimble.com/timing for the latest documentation & tools, part numbers and ordering information.

Trimble has relied on representations made by its suppliers in certifying this product as RoHS compliant.

Specifications subject to change without notice.

Trimble Navigation Limited is not responsible for the operation or failure of operation of GPS satellites or the availability of GPS satellite signals.

NORTH AMERICA
Trimble Navigation Limited
Corporate Headquarters
935 Stewart Drive
Sunnyvale, CA 94086
+1-800-787-4225
+1-408-481-7741
timing@trimble.com

EUROPE
Trimble Navigation Europe
Phone: +49-6142-2100-161

KOREA
Trimble Export Ltd, Korea
Phone: +82 2 555 5361

CHINA
Trimble Navigation Ltd, China
Phone: +86-21-6391-7814

